



FK GROUP SPA

Via Friuli, 21
24044 Dalmine (BG) - Italy
Tel. +39 035 565633

Sales Dept.

commercial@fkgroup.com
Tel. +39 035 565633
Fax +39 035 564445

Customer Service


customer.service@fkgroup.com
Tel. +39 035 566647
Fax +39 035 564445



UNI EN ISO 9001:2015 Certified
Quality Management Company

www.fkgroup.com
fkgroup@fkgroup.com

09/2019

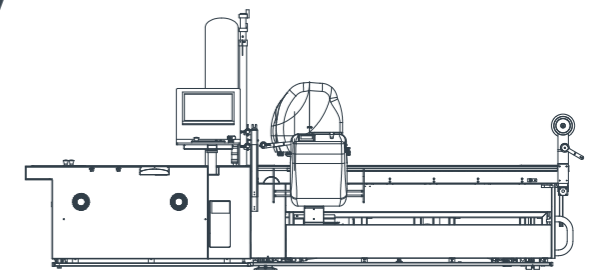

Universal Cutting System



Made in Italy 

Universal

Automatic conveyor cutting system offering the choice of **6-8-9cm cutting head** for all types of production. **Universal** is a new project capable of accelerating working cycles through both speed and productivity, applying a mix of technical characteristics and innovative materials enabling to reach cutting performances never achieved before.

- **JUST CUT:** the simple and intuitive Software makes all cutting parameters setting fast and safe;
- **Eco Power** vacuum system guarantees considerable power saving;
- Patented high speed sharpening system: longlife sharpeners;
- **Fast Revolution:** allows cutting flexibility for all material types;
- **Mectronics Blade Sense:** automatic knife deflection correction;
- Blade lubrication or cooling system;
- Remote technical assistance, also via web, ensuring just in time total and constant support;
- **No Stop Cutting system** involving two alternative methods: Continuous Cutting software to enhance cutting while advancing, Quick Release Vacuum suitable for high ply cutting (optional).

Average power consumption 6.3kW




Industry 4.0
READY

Working Area (cm)	180 x 170	200 x 170	220 x 170	180 x 240	200 x 240	220 x 240
Overall dimensions LxWxH (cm)	470 x 290 x 220	470 x 310 x 220	470 x 330 x 220	592,3 x 290 x 220	592,3 x 310 x 220	592,3 x 330 x 220
Weight (Kg)	2880	2960	3040	3220	3300	3380
Installed Power (kW)	15					
Average Consumption (kW)	5,9	5,9	5,9	6,3	6,3	6,3
Power supply Tension	400V±10%					
Max compressed lay height (cm)	6-8-9					

With the aim of improving its machinery FKgroup reserve the right to change the technical characteristics without prior notice.



Pneumatic head cover lift with double movement.

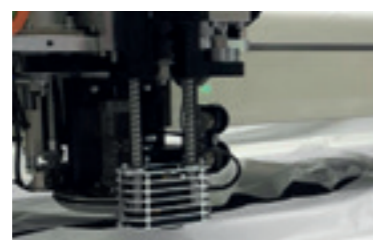

Drilling device with bit and variable heat control or spinning punches.



Blade cooling or lubrication system according to fabrics.



Tool ISO Editor image position, notches, drill holes, lines.

